


NN6PP24M - NENCO CAT6 UTP PATCH PANEL 24 PORT WITH CABLE MANAGEMENT

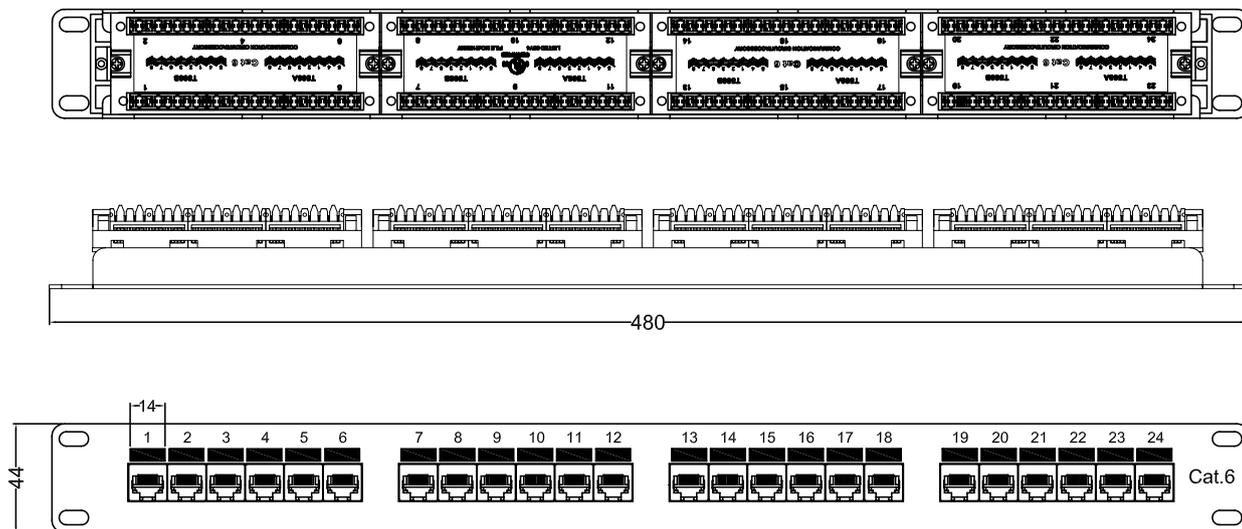

PHYSICAL SPECIFICATION

- 🟢 **Jack Housing:** Polybutylene Terephthalate Resin high-impact UL94V-2
- 🟢 **Spring Wire:** Phosphor Bronze C5210 Temper Wire 50u Gold over 100u nickel undercoat
- 🟢 **Insertion Life:** 750 Mating Cycles with FCC Compliant RJ-45 plug
- 🟢 **IDC Housing:** Polycarbonate Resin High-Impact UL94V-2
- 🟢 **IDC Contact:** Phosphor Bronze C519R-H, T=0.4mm 200u tin over 60u Nickel undercoat
- 🟢 **Contact Force:** 100 Grams with FCC Compliant RJ-45 Plug
- 🟢 **Plug Retention Force:** 11 ibf min
- 🟢 **Durability:** 200 Termination Cycles
- 🟢 **Contact Compatability:** Accomodates 22 to 26 AWG solid/24 AWG Stranded
- 🟢 **Operating Temperature:** -10°C to 60°C
- 🟢 **Storage Temperature:** -40°C to 68°C
- 🟢 **Humidity:** 10%-90%RH

ELECTRICAL

- 🟢 **Insulation Resistance:** 500 M Ω
- 🟢 **Dielectric Withstanding Voltage:** 1000 V
- 🟢 **DC Current Rating:** 1.5 Amps
- 🟢 **DC Resistance:** 0.1 Ω
- 🟢 **Contact Resistance:** 200m Ω
- 🟢 110 only

