

## FC SM & MM Patch Panel



Standard 1U 19" fibre optic patch panel suitable for spliced or direct fibre terminations. The panel has been designed with a sliding tray for ease of use. The panel finish is a black powder coating which is scratch resistant.

The tray fixes into the lid by means of plastic push clips which are easily released when access is required. When the panel is fixed in to an equipment cabinet or rack the tray can be fully extended and is supported by the lid to allow hands free access to the fibre terminations. The base of the tray has four fixing points for cable ties. For identification, the tray has numbered adapter ports.

Dimensions	
Width	432mm
Depth	206mm
Height	44mm
Weight	2.3kgs
Material	Steel
Lid Thickness	1.5mm nominal
Tray Thickness	1.2mm nominal

Standard 1U panels are loaded with adapters to suit customer needs. Depending on style of connection, panels can be configured to accommodate up to 96 fibres. Any unused adapter ports will be blanked off.

The lid of the panel has been strengthened with bends front and rear which stop it from bowing in the middle. The mounting ears are movable so the panel can be set up to be recessed within the cabinet to allow a better bend radius for patch cords.


Cable access is through a choice of six inputs on the rear of the panel, two suitable for PG16 gland (up to 15mm cable diameter) and four are suitable for PG11 gland (up to 10mm cable diameter). Four of the cable entries have a 'U' cut out allowing pre-terminated cables to be easily installed into the patch panel.

Panels are individually packed in pizza style boxes and are supplied with an accessory kit comprising:

- 1 x PG16 gland
- 2 x PG11 gland
- 3 x blanking plugs
- 4 x kurly lok with self-adhesive base
- 4 x cage nut, screw and cup washer



## MM Matrix

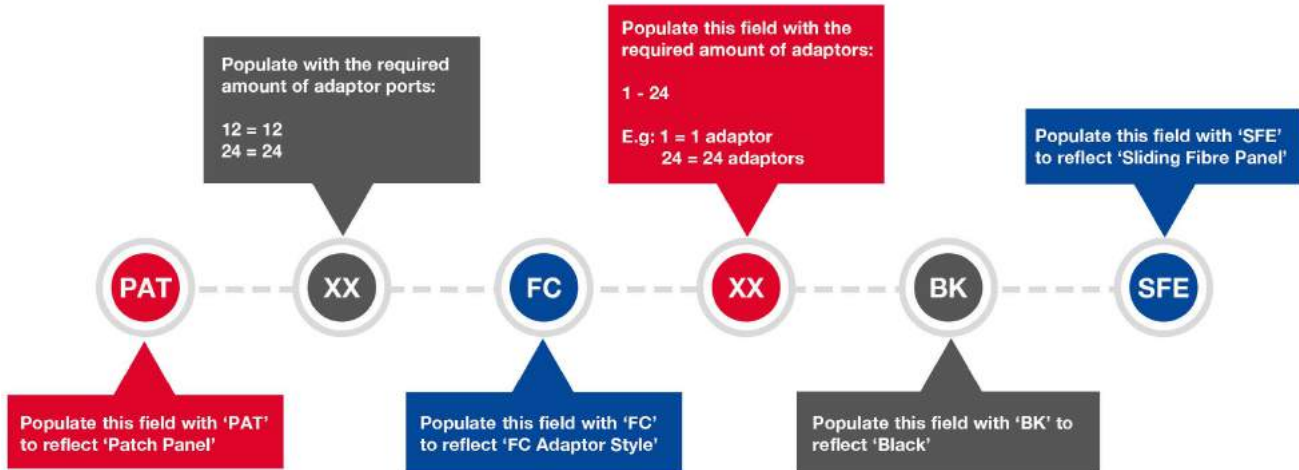

## SM Matrix

