


Net-C SC Adaptors MM/SM

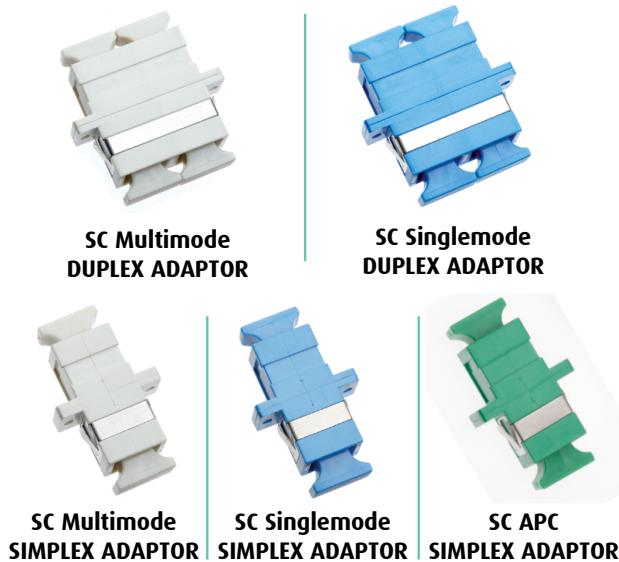

Mode	Singlemode	Multimode
Typical Insertion loss	0.20dB	0.30dB
Humidity Cycling	75°C RH 95%	75°C RH 95%
Vibration	10-55 hz (3 axis)	10-55 hz (3 axis)
Durability (500 matings)	0.12 dB Max	0.12 dB Max

- » Low insertion loss.
- » Easy to handle.
- » Environmentally stable.
- » Compliant with IEC, TIA.
- » Hybrid adaptors available.

Applications:

- » Local Area Networks.
- » FTTH (Fibre To The Home).
- » CATV and CCTV.
- » Telecoms.

Part Number	Description
AD-SC-SX-MM	SC simplex Multimode adaptor
AD-SC-SX-SM	SC simplex Singlemode adaptor
AD-SC-DX-MM	SC duplex Singlemode adaptor
AD-SC-DX-SM	SC duplex Multimode adaptor
AD-SCA-DX-MM	SC/APC duplex Multimode adaptor
AD-SCA-DX-SM	SC/APC duplex Singlemode adaptor
AD-SCA-SX-MM	SC/APC simplex Multimode adaptor
AD-SCA-SX-SM	SC/APC simplex Singlemode adaptor

- » Increases panel density and quick plug in installation.
- » Simplex and duplex panel cutouts.
- » Panel clip for easy installation.
- » Standard colours: Beige – Multimode, Blue – Singlemode.
- » Available in several colours upon request.
- » Removable duplex flanges.



Call: +44 (0) 1403 754 233, Email: enquiries@networkscentre.com or visit: www.networkscentre.com
Networks Centre Ltd, Head Office, Lawson Hunt Industrial Park, Broadbridge Heath, West Sussex, RH12 3JR