


# QSFP28 100G Direct Attach Copper Cables

Siemon QSFP28 Passive Direct Attach Copper Cable assemblies exceed 100G Ethernet (100GBASE-CR4) specifications. They are designed for high-density applications, offering a cost-effective, low-power option for high-speed data center interconnects. This next generation product shares the same mating interface with QSFP+ (SFF-8436) form factors, making it backward compatible with existing QSFP+ ports. These direct attach cable assemblies are available in standard lengths up to 5 meters for support of up to 100G Ethernet applications.

## Applications

- Ethernet 10G, 25G, 40G, 100G (100GBASE-CR4)
- Rack-to-Rack
- Top-of-Rack
- Switch-to-Switch
- Switch-to-Server
- Networking
- Storage
- Hubs
- Routers
- Servers
- NIC

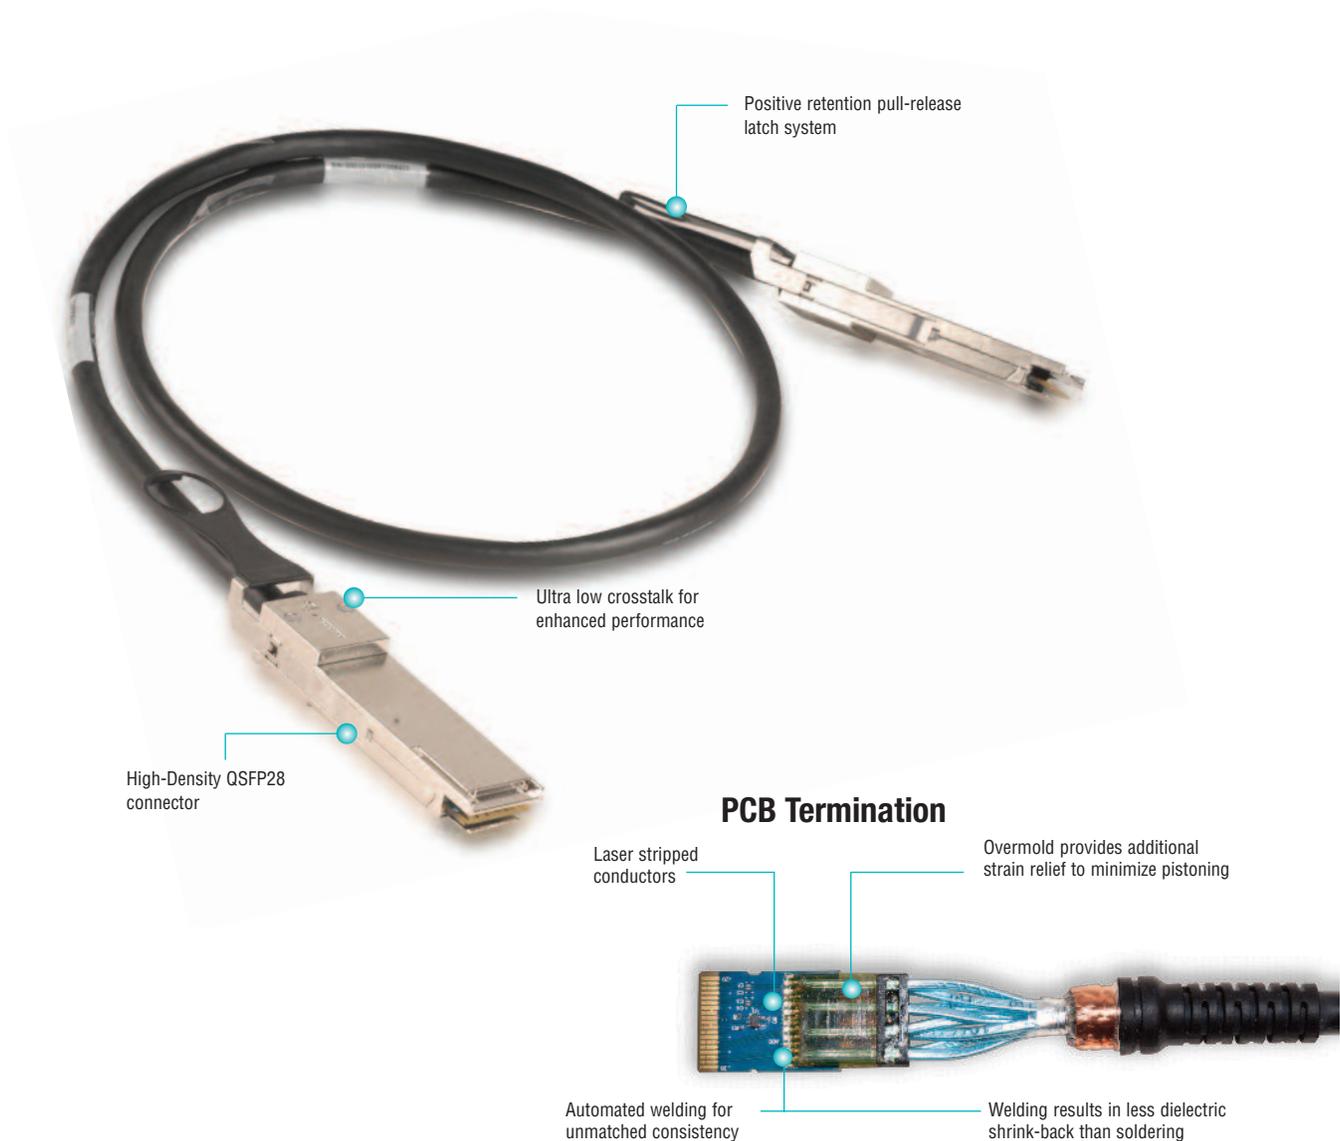

# QSFP28 100G Direct Attach Copper Cables

## Ordering Information:

QSFP28 to QSFP28 Passive Copper Cable Assemblies

Part Number	Length	Gauge
Q1Q28P300.5-01(X)	0.5m (1.6 ft.)	30
Q1Q28P301.0-01(X)	1m (3.3 ft.)	30
Q1Q28P301.5-01(X)	1.5m (4.9 ft.)	30
Q1Q28P302.0-01(X)	2m (6.6 ft.)	30
Q1Q28P262.5-01(X)	2.5m (8.2 ft.)	26
Q1Q28P263.0-01(X)	3m (9.8 ft.)	26
Q1Q28P265.0-01(X)*	5m (16.4 ft.)	26

Use (X) to specify jacket: L = CL2/LSOH, P = PVC

All cables compliant to IEEE 802.3by, CA-N. Will work with or without FEC unless otherwise noted.

\*Compliant to IEEE 802.3bj, CA-L. Will work with RS-FEC.

## PERFORMANCE SPECIFICATIONS

Electrical	
Min. Dielectric Withstand Voltage	300 VDC
Insulation Resistance	1000 Mohms
Current Rating	0.5 Amp Min/Signal Contact
General	
Operating Temperature	-5 to 70° C (32 to 158° F)
Flammability Rating (Plastics)	UL 94
Green Features	RoHS, Lead-Free
Shield	Braid/Foil
Marking	Mfg Name, Part #, Date Code

Plug	
Backshell Material	Nickel Plated Zinc Diecast
Contact Material	PCB with Gold-Plated Pads
Latch	Positive Latching with Nylon Pull Tab
Insertion Force	40N (9.0 lbf.) Max
Withdrawal Force	30N (6.7 lbf.) Max
Retention Force	90N (20.2 lbf.) Min
Durability	250 Cycles Min
Cable	
Conductor	Solid
Wire Gauge	30 AWG and 26 AWG
Impedance	100 +/- 10 ohms
Construction	Twinaxial
Cable OD	30 AWG = 7.2mm (0.283 in.)
	26 AWG = 9.5mm (0.374in.)
Jacket Type	PVC or CL2/LSOH
Bend Radius	5X Cable OD - Single 10X Cable OD - Repeated

Standards Compliance
IEEE 802.3by, IEEE 802.3bj
SFF-8636, SFF-8661, SFF-8665, SFF-8697
RoHS

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

<b>Worldwide Headquarters</b> <b>North America</b> Watertown, CT USA Phone (1) 860 945 4200	<b>Regional Headquarters</b> <b>Europe</b> Chertsey, Surrey, England Phone (44) 0 1932 571771	<b>Regional Headquarters</b> <b>Russia</b> Moscow, Russia Phone (7) 495 781 1111	<b>Regional Headquarters</b> <b>Africa</b> Cape Town, South Africa Phone (27) 21 5385 0303	<b>Regional Headquarters</b> <b>China</b> Shanghai, P.R. China Phone (86) 215385 0303	<b>Regional Headquarters</b> <b>Latin America</b> Bogota, Colombia Phone (571) 657 1950/51/52	<b>Regional Headquarters</b> <b>India</b> Dubai, United Arab Emirates Phone (971) 4 3689743	<b>Regional Headquarters</b> <b>Middle East</b> Dubai, United Arab Emirates Phone (971) 4 3689743	<b>Regional Headquarters</b> <b>Asia Pacific</b> Sydney, Australia Phone (86) 21 5385 0303	<b>Siemon Interconnect Solutions</b> <b>Watertown, CT USA</b> Phone (1) 860 945 4213 US www.siemon.com/SIS
--	--	---	---	--	--	--	--	---	---

www.siemon.com

