


SFP28 25G Direct Attach Copper Cables


Siemon SFP28 Passive Direct Attach Copper Cable assemblies exceed 25G Ethernet (25GBASE-CR) specifications. They are designed for high-density applications, offering a cost-effective, low-power option for high-speed data center interconnects. This next generation product shares the same mating interface with SFP+ (SFF-8431) form factors, making it backward compatible with existing SFP+ ports. These direct attach cable assemblies are available in standard lengths up to 5 meters for support of up to 25G Ethernet applications.

Applications

- Ethernet 10G, 25G (25GBASE-CR)
- Middle-of-Row
- Rack-to-Rack
- Top-of-Rack
- Switch-to-Switch
- Switch-to-Server
- Networking
- Storage
- Hubs
- Routers
- Servers
- NIC

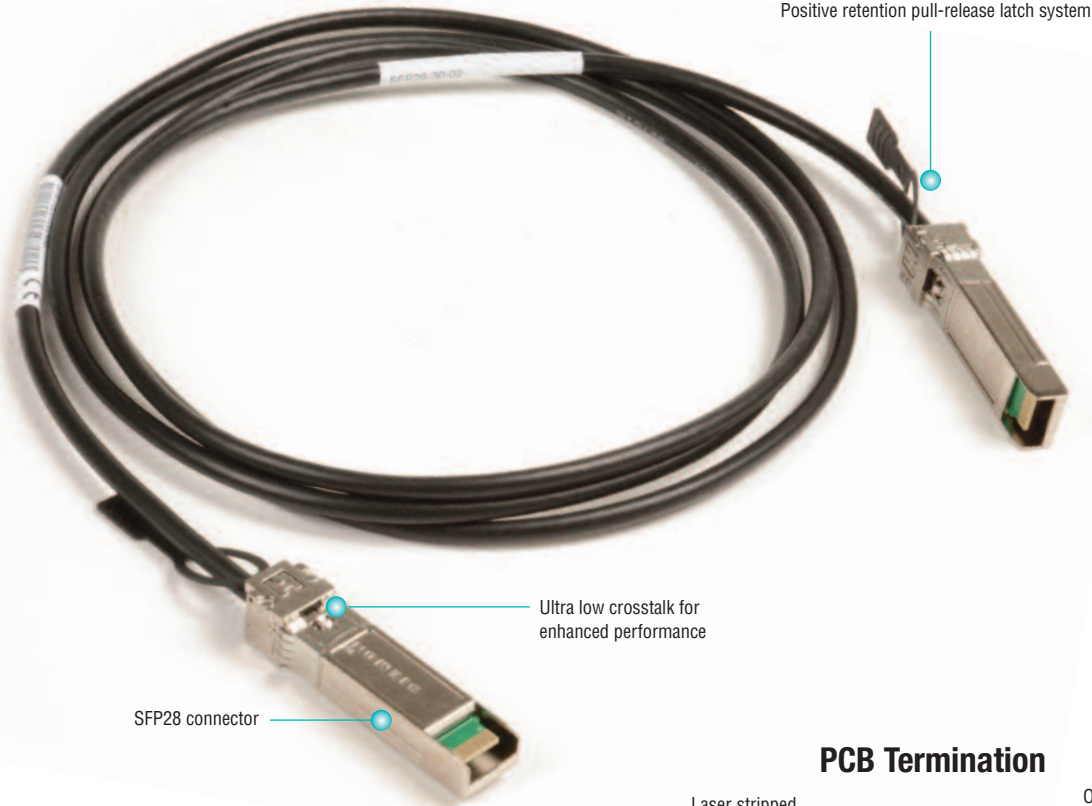

PCB Termination

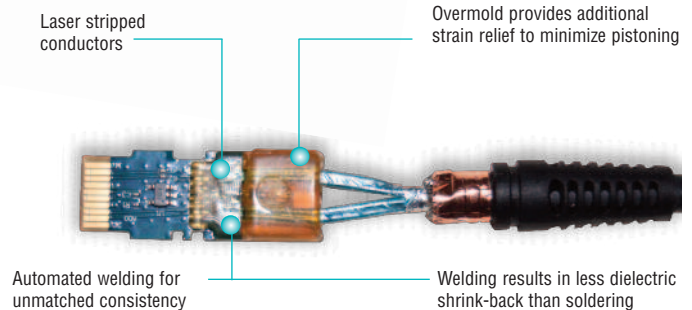

SFP28 25G Direct Attach Copper Cables

Ordering Information:

SFP28 to SFP28 Passive Copper Cable Assemblies

Part Number	Length	Gauge
S1S28P300.5-01(X)	0.5m (1.6 ft.)	30
S1S28P301.0-01(X)	1m (3.3 ft.)	30
S1S28P301.5-01(X)	1.5m (4.9 ft.)	30
S1S28P302.0-01(X)	2m (6.6 ft.)	30
S1S28P262.5-01(X)	2.5m (8.2 ft.)	26
S1S28P263.0-01(X)	3m (9.8 ft.)	26
S1S28P265.0-01(X)*	5m (16.4 ft.)	26

Use (X) to specify jacket: L = CL2/LSOH, P = PVC

All cables compliant to IEEE 802.3by, CA-N. Will work with or without FEC unless otherwise noted.

*Compliant to IEEE 802.3bj, CA-L. Will work with RS-FEC.

PERFORMANCE SPECIFICATIONS

Electrical	
Min. Dielectric Withstand Voltage	300 VDC
Insulation Resistance	1000 Mohms
Current Rating	0.5 Amp Min/Signal Contact
General	
Operating Temperature	-5 to 70° C (32 to 158° F)
Flammability Rating (Plastics)	UL 94
Green Features	RoHS, Lead-Free
Shield	Braid/Foil
Marking	Mfg Name, Part #, Date Code

Plug	
Backshell Material	Nickel Plated Zinc Diecast
Contact Material	PCB with Gold-Plated Pads
Latch	Positive Latching with Nylon Pull Tab
Insertion Force	18N (4.0 lbf.) Max
Withdrawal Force	12.5N (2.8 lbf.) Max
Retention Force	90N (20.2 lbf.) Min
Durability	250 Cycles Min
Cable	
Conductor	Solid
Wire Gauge	30 AWG and 26 AWG
Impedance	100 +/- 10 ohms
Construction	Twinaxial
Cable OD	30 AWG = 4.5mm (0.177 in.)
	26 AWG = 6mm (0.236 in.)
Jacket Type	PVC or CL2/LSOH
Bend Radius	5X Cable OD - Single 10X Cable OD - Repeated

Standards Compliance
IEEE 802.3by
SFF-8402, SFF-8419, SFF-8432
RoHS

SIS_SS_SFP28_RevD_0418

© 2018 Siemon

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Worldwide Headquarters North America Watertown, CT USA Phone (1) 860 945 4200	Regional Headquarters Europe Russia Africa Chertsy, Surrey, England Phone (44) 0 1932 571771	Regional Headquarters China Shanghai, P.R. China Phone (86) 215385 0303	Regional Headquarters Latin America Bogota, Colombia Phone (571) 657 1950/51/52	Regional Headquarters India Middle East Dubai, United Arab Emirates Phone (971) 4 3689743	Regional Headquarters Asia Pacific Sydney, Australia Phone (86) 21 5385 0303	Siemon Interconnect Solutions Watertown, CT USA Phone (1) 860 945 4213 US www.siemon.com/SIS
--	---	--	--	--	---	---