




MicroDuct Size Selection Guidelines - Size vs Fibre Count Single Blown Fibre Elements

MicroDuct Size Selection Guidelines

Blowing Distance (Metres)	1 Fibre	2 Fibre	4 Fibre	6 Fibre	8 Fibre	12 Fibre
100	3mm	3mm	3mm	5mm	5mm	5mm
200	3mm	3mm	3mm	5mm	5mm	5mm
300	3mm	3mm	3mm	5mm	5mm	5mm
400	3mm	3mm	5mm	5mm	5mm	5mm
500	3mm	3mm	5mm	5mm	5mm	8mm
600	8mm	8mm	8mm	8mm	8mm	-
700	8mm	8mm	8mm	8mm	8mm	-
800	8mm	8mm	8mm	8mm	8mm	-
900	8mm	8mm	8mm	8mm	8mm	-
1000	8mm	8mm	8mm	8mm	8mm	-

Product Part Numbering

	62.5/125	50/125	OM3	OM4	8/125
White	10-0101-03	10-0005-03	10-0003-03	10-0004-03	10-0200-03
Black	10-0101-05	10-0005-05	10-0003-05	10-0004-05	10-0200-05
Blue	10-0101-06	10-0005-06	10-0003-06	10-0004-06	10-0200-06
Orange	10-0101-07	10-0005-07	10-0003-07	10-0004-07	10-0200-07
Green	10-0101-08	10-0005-08	10-0003-08	10-0004-08	10-0200-08
Red	10-0101-09	10-0005-09	10-0003-09	10-0004-09	10-0200-09
Grey	10-0101-10	10-0005-10	10-0003-10	10-0004-10	10-0200-10
Yellow	10-0101-11	10-0005-11	10-0003-11	10-0004-11	10-0200-11
Brown	10-0101-12	10-0005-12	10-0003-12	10-0004-12	10-0200-12
Violet	10-0101-13	10-0005-13	10-0003-13	10-0004-13	10-0200-13
Pink	10-0101-14	10-0005-14	10-0003-14	10-0004-14	10-0200-14
Turquoise	10-0101-15	10-0005-15	10-0003-15	10-0004-15	10-0200-15

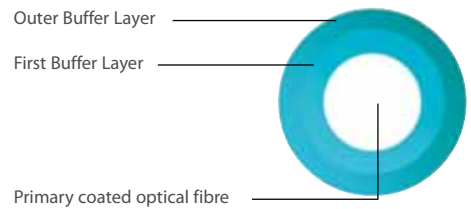

Unique 'Blowable' coating

12 Standard Colours

Installation up to 1000m

PRODUCT DESCRIPTION:

The Blolite system offers a complete range of high quality single mode and multimode optical fibres, with a blowable coating and having a finished size of 500 µm. The Blolite fibre is strippable with standard tools and is compatible with standard connector types.

Blolite fibre is available in twelve standard colours and is supplied on plastic spools in 2km or 4km lengths for installation into Blolite 3mm, 5mm and 8mm MicroDuct by trained and licensed Blolite installers using the IM2000 blow head.